

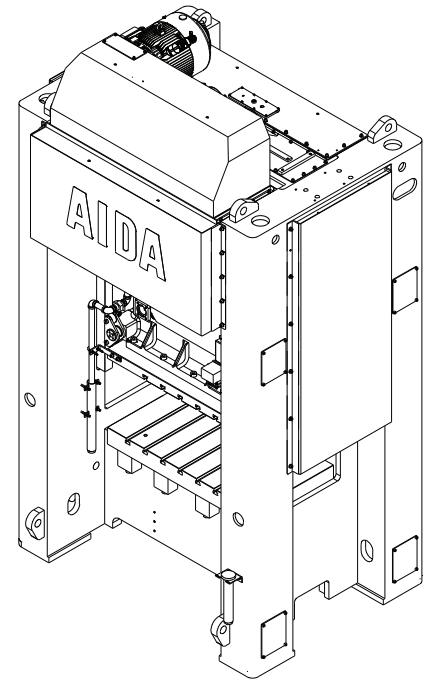


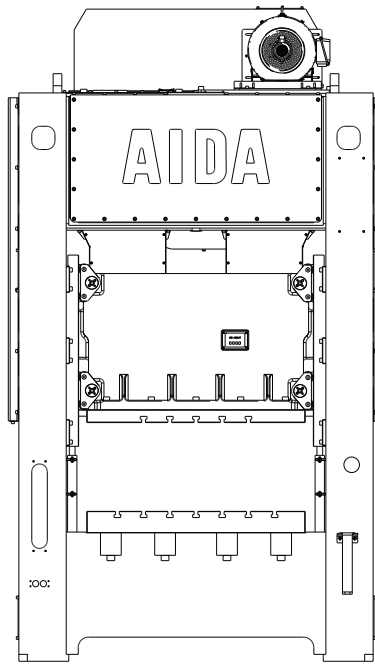

NSX SPECIFICATIONS

NSX (TWO-POINT, STRAIGHTSIDE MECHANICAL)

Press Technical Data	Unit	NSX-1100(1)	Press Technical Data	Unit	NSX-1100(1)
Strokes Per Minute	spm	120 - 300	Standard Voltage	V / ph / Hz	460 / 3 / 60
Capacity	kN	1,100	Max Upper Die Weight	kg	600
	U.S. ton	121		lb.	1,320
Full Stroke Length	mm	65	Side Window Opening (FB x H)	mm	500 x 400
	in.	2.5		in.	19.7 x 15.7
Rating Point	mm	3	Press Foot to Top of Bolster (without mounts)	mm	870
	in.	0.12		in.	34.3
Die Height (SDAU)	mm	450	Approx. Overall Height (without mounts)	mm	3,802
	in.	17.7		in.	150
Slide Adjustment	mm	150	Approx. Weight of Press (without mounts)	kg	17,000
	in.	5.9		lb.	37,500
Slide & Bolster Area (LR x FB)	mm	1,270 x 700	Main Motor	kW	18
	in.	50.0 x 27.5		HP	24
Bolster Thickness	mm	125	Air Supply	MPa	0.55
	in.	4.9		psi	80

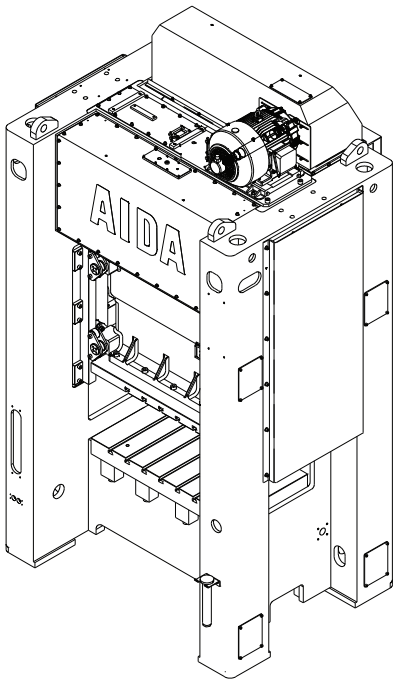

AIDA
America

AIDA-America Corporation

7660 Center Point 70 Blvd., Dayton, OH U.S.A. 45424

Office: (937) 237-2382

Service: (937) 235-3599

info@aida-america.com

www.aida-america.com

